


FEATURES


- **AEC-Q200 Compliant**
- **Standard 5.0mm x 3.2mm Glass Seal Package**
- **Fundamental Crystal Design**
- Frequency Range 8 – 40 MHz Fundamental, 24 – 120 MHz 3rd Overtone
- Frequency Tolerance; ± 20 ppm, ± 30 ppm and ± 50 ppm
- Frequency Stability, reference Ordering Information
- Operating Temperature, -40°C to +125°C standard
- Tape & Reel Packaging Standard, EIA-481
- **RoHS Compliant in Accordance with EU Directive 2011/65/EU**
 - Lead-Free Termination Finish
 - Exemption 7(c)-I, Electrical and electronic components containing lead [Pb] in glass

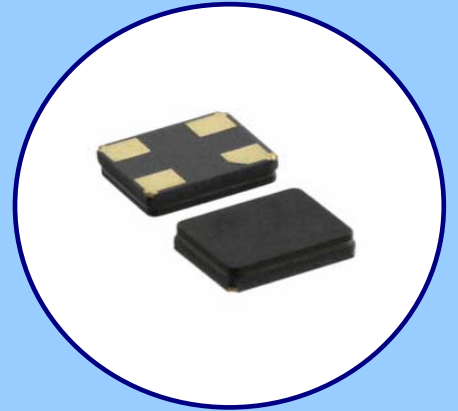

APPLICATIONS

Model GA534 is a low cost crystal specifically developed for use in automotive electronics.

ORDERING INFORMATION


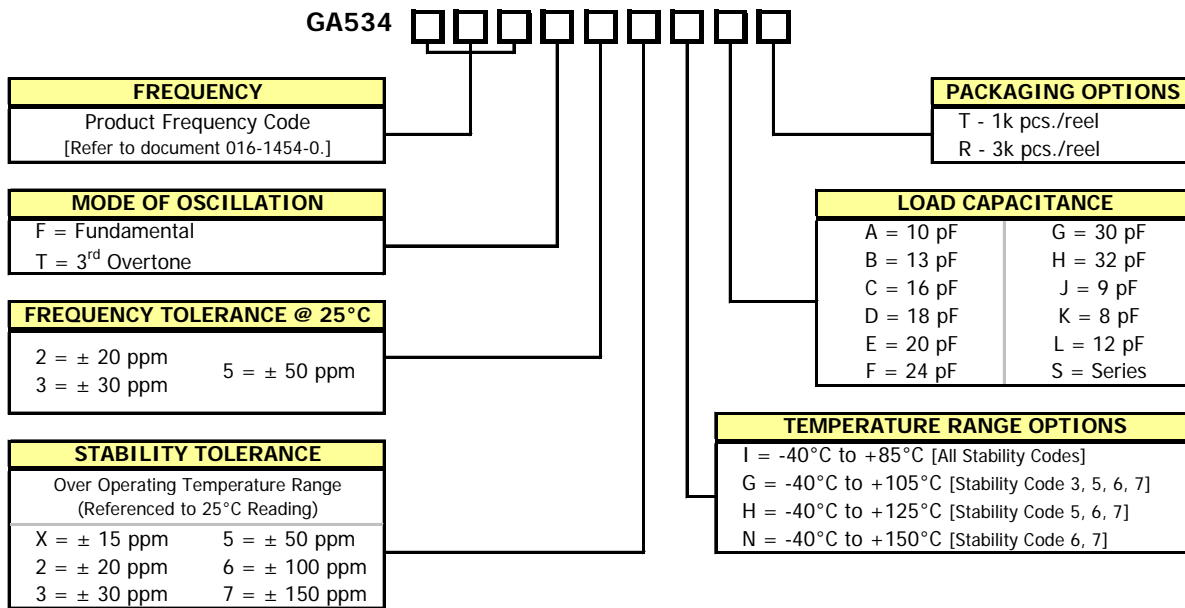


Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.

PACKAGING INFORMATION [Reference]

Device quantity is 1k pcs. minimum and 3k pcs. maximum per 180mm reel.


DIMENSIONS IN MILLIMETERS

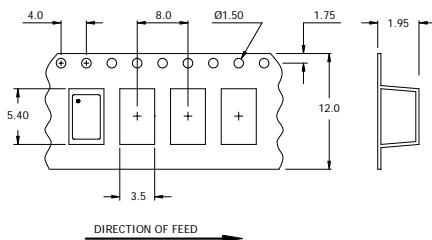

ELECTRICAL CHARACTERISTICS

ELECTRICAL PARAMETERS	PARAMETER	VALUE			
	Operating Mode	Fundamental		3 rd Overtone	
	Frequency Range	8.0 MHz to 40.0 MHz		24.0 MHz to 120.0 MHz	
	Crystal Cut	AT-Cut			
	Frequency Tolerance @ 25°C	±20 ppm, ±30 ppm, ±50 ppm			
	Frequency Stability Tolerance ¹ [Operating Temperature Range, Referenced to 25°C Reading]	±15 ppm, ±20 ppm, ±30 ppm, ±50 ppm, ±100 ppm, ±150 ppm			
	Operating Temperature Range ¹	-40°C to +85°C [All Stability Codes] -40°C to +105°C [Stability Code 3, 5, 6, 7] -40°C to +125°C [Stability Code 5, 6, 7] -40°C to +150°C [Stability Code 7]			
	Equivalent Series Resistance	8.000 MHz - 9.999 MHz	150 Ohms maximum	24.000 MHz - 53.999 MHz	150 Ohms maximum
		10.000 MHz - 15.999 MHz	60 Ohms maximum	54.000 MHz - 120.000 MHz	100 Ohms maximum
		16.000 MHz - 40.000 MHz	50 Ohms maximum		
	Load Capacitance or Resonance Mode [See Ordering Information for More Options]	8pF, 12pF standard			
	Shunt Capacitance (C ₀)	3.0 pF typical, 5.0 pF maximum			
	Drive Level	10 μW typical, 100 μW maximum			
	Aging @ +25°C	±5 ppm/yr maximum			
	Insulation Resistance [@ DC 100V]	500M Ohms minimum			
	Storage Temperature Range	-40°C to +125°C			
	Reflow Condition, per JEDEC J-STD-020	+260°C maximum, 10 Seconds maximum			


¹ See Ordering Information.

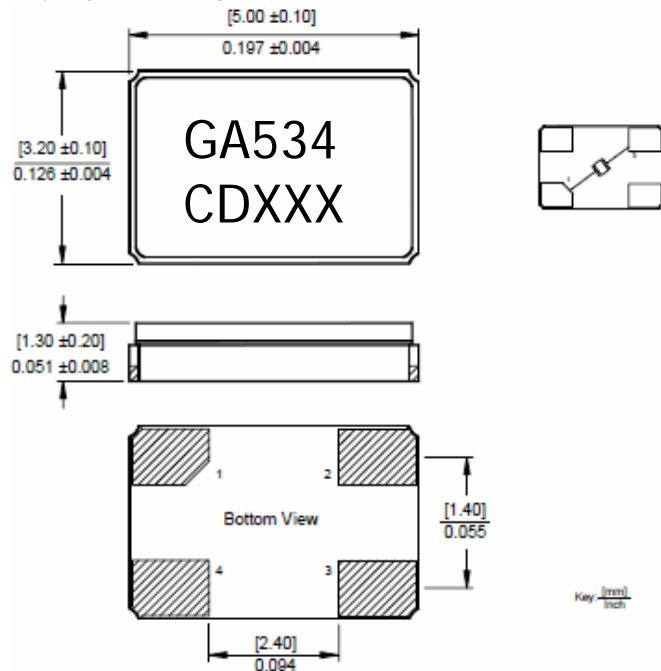MECHANICAL SPECIFICATIONS
PACKAGE DRAWING

MARKING INFORMATION

- GA534 - CTS Model Series.
- C - CTS.
- D - Date code. See Table I for codes.
- XXX - Frequency code.
[Reference CTS document 016-1450-0, Frequency Code Tables.]

NOTES

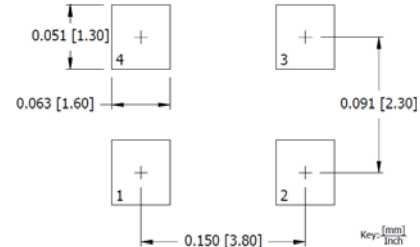- Complete CTS part number, frequency value, date code and manufacturing site code information must appear on reel and carton labels.
- Termination pads (e4); barrier plating is nickel [Ni] with gold [Au] flash plate.
- Reflow conditions per JEDEC J-STD-020; 260°C maximum, 10 seconds.

SUGGESTED SOLDER PAD GEOMETRY

TABLE I - DATE CODE

YEAR \ MONTH					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2001	2005	2009	2013	2017	A	B	C	D	E	F	G	H	J	K	L	M
2002	2006	2010	2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2003	2007	2011	2015	2019	a	b	c	d	e	f	g	h	j	k	l	m
2004	2008	2012	2016	2020	n	p	q	r	s	t	u	v	w	x	y	z